

IS THE RETRACTABLE INCLUDED WITH THE ANCHOR?

No, the retractable is not included. A retractable up to 50 ft. in length must be purchased separately.

DO I HAVE TO BUY A CERTAIN KIND OF RETRACTABLE FOR USE WITH THIS ANCHOR?

No, the clamp is designed to accept most types of retractables up to 50 ft. in length.

IS THE ANCHOR POINT RATED FOR 5,000 LBS. OR 3,000 LBS?


The anchor is rated for 3,000 lbs. providing fall arrest or restraint with the required use of a retractable.



26513 79th Ave. S.
Kent, WA
800-466-6385
www.guardianfall.com



Standing Seam Roof Clamp

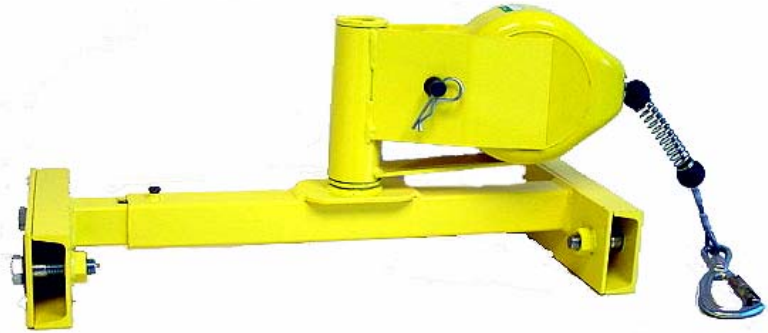

APPLICATIONS:

- For use on metal standing seam roof
- Fits any roof pitch
- Reusable, temporary use only
- Use with retractable lifeline

FEATURES:

- Telescoping clamp fastens to most standing seam structures
- Pivoting stanchion allows freedom of movement without tangling of lifeline
- Clamping design eliminates puncturing of the roof
- Legs adjust 24" to 36" to fit seam spacing
- Powder coated finish

PROPER USE:

Standing Seam Roof Clamp is attached by clamping to a roof deck capable of supporting 3,000 lbs. Not for use in work positioning. Clamp provides fall arrest or restraint attachment for one worker weighing no more than 310 lbs. including tools, clothing, etc. Worker attaches directly to the anchor point using a retractable lifeline and harness system.

LIMITATIONS:

Standing Seam Roof Clamp must be installed only according to provided instructions. It is required that the clamp be inspected daily for sufficient placement strength and that anchor bolts are re-torqued to 50 foot pounds DAILY. Maximum retractable length is 50 ft. Do not use near corrosive chemicals. Retractable not included.

PART #: 00250

Standing Seam Roof Clamp is tested to meet all applicable ANSI Z359.1 standards and comply with OSHA standards. Use only with compatible equipment.