



STREAMLIGHT SURVIVOR® LED

MARKET APPLICATIONS:

Fire & Rescue, Law Enforcement, Industrial Safety, Public Works & Utilities, Marine

DESCRIPTION:

The Survivor® LED is a lightweight, hand-held light with right angle head designed for use in hazardous locations. This light features the latest in power LED technology, offers microprocessor controlled high and low intensity modes and emergency flash. New C4 LED technology produces 2 to 3 times the output of previous LEDs.

CASE MATERIAL:

Housing, base and battery housing made from high impact super tough nylon, offering exceptional durability and passes a 30 Ft drop test. All openings are O-ring sealed for weather resistance. Spring loaded clip with built in ring easily attaches to belts and harnesses. One way valve for case venting. Available in international safety orange, high visibility yellow or black.

DIMENSIONS:

Height: 7.06 in. (17.92 cm) Width: 2.85 in. (7.24 cm) Diameter: 2.87 in. (7.29 cm)
Height in charger: 8.67 in. (22.02 cm)
Grip area: Height: 3.6 in. (9.14 cm) Width: 2.20 in. (5.59 cm) Thickness: 1.35 in. (3.43cm)

WEIGHT:

Ni-Cd: 17.9 oz (508 grams)* Alkaline: 13.1 oz (371 grams)*

LENS:

Unbreakable polycarbonate with silicone anti-scratch coating is assembled in a heavy duty bezel. O-ring sealed.

LIGHT SOURCE:

C4 LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

High: 21,000 candela peak beam intensity and 100 lumens measured system output.
Low: 7,500 candela peak beam intensity and 32 lumens measured system output.
Deep-dish parabolic reflector produces narrow beam; ideal for smoke-cutting applications. Optimum peripheral illumination to aid in navigation.

ON/OFF:

Sonic welded push button switch designed for extremely long life. A rubber dome push button actuator provides easy operation even when wearing heavy gloves.

RUN TIME:

Ni-Cd: High: 3.5 continuous hours to the 10% output level. Low: 10+ hours. Flash: 7+ hours.
Alkaline: High: 4 continuous hours to the 10% output level. Low: 14+ hours. Flash: 7+ hours.

BATTERY:

Industrial rechargeable nickel-cadmium 4.8 volt, 1.8 amp hour, 4 cell sub-C can be recharged up to 1,000 times. Optional four (4) "AA" alkaline non-rechargeable battery pack provides fast replacement with readily available batteries.

CHARGING:

AC and DC one-hour fast chargers with full charge indicators designed specifically for AC or DC power sources. The universal Steady Charger, which requires up to 10 hours for a complete charge, can be used with 110V, 120V, 230V, 240V, or 12V DC by exchanging its charge cord.

FEATURES:

Serialized for positive identification

APPROVALS**:

UL Listed Class I, Division 1, Groups C & D; Class I, Division 2, Groups A, B, C, D;
Class II, Division 2, Groups F & G; Class III, Temperature Code: T4
UL-Canada Listed Class I, Division 1, Groups C & D, Exia; Class I, Division 2, Groups A, B, C, D;
Class II, Division 2, Groups F & G; Class III, Temperature Code: T4
Charger meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position.
Most models meet applicable European Community Directives.


WARRANTY:

Limited lifetime warranty.

OPTIONAL ACCESSORIES:

5-Unit Bank Charger

* With battery (included in purchase)
** See product for specific ratings.

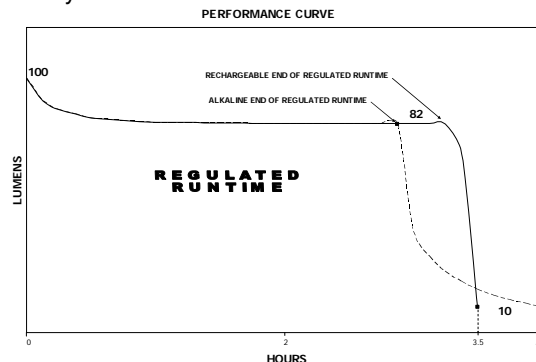

Designed and Assembled In The USA.