

NEW FROM DBI/SALA

ISO 9001



# Trolley Anchorage Connector

For Self Retracting Lifelines on horizontal I-beams



*At last,  
a trolley  
that can  
face the  
elements  
and keep  
on rolling!*

Moves effortlessly along horizontal I-beams for complete hands-free mobility and total safety!

- Non-corrosive double-shielded wheel bearings are maintenance free and provide smooth and effortless operation.
- Extremely lightweight design installs easily and quickly overhead with no tools necessary at ends or midpoint on beams.
- Provides added maneuverability, improved safety and increased productivity for greater user acceptance.
- For use with DBI/SALA's industry preferred Self Retracting Lifelines.
- Fits beam flanges three inches to eight inches wide, and up to 11/16 inch thick. Flat or tapered flange beams.
- Meets OSHA & ANSI requirements including the stringent ANSI Z359.1.

SALA's  
Industry Preferred  
SRL's



Patented Sealed SRL's  
available in  
50', 85', & 130' lengths



Ultra-Lok® SRL's in  
20', 30', & 50' lengths  
Web in 11' & 20' lengths

**ISO 9001**


USA  
3965 Pepin Avenue  
Red Wing, MN 55066  
800-328-6146  
Fax: 651-388-5065  
www.salagroup.com

CANADA  
260 Export Boulevard  
Mississauga, Ontario  
L5S 1Y9  
800-387-7484  
Fax: 905-795-8777  
www.salagroup.com

**DBI**  
**SALA**®

# Trolley Anchorage Connector

For Self Retracting Lifelines on horizontal I-beams

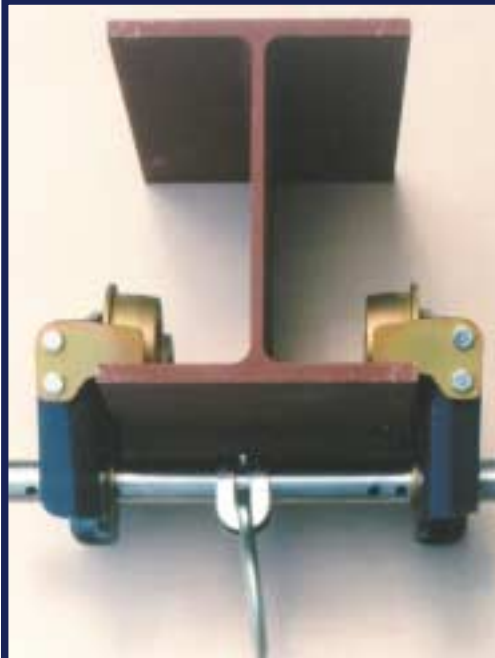

Trolley Guards keep beam ahead of trolley clear of debris & protect wheels from damage.



Our advanced "no-more-hassles" adjuster dial makes installing quick and easy.

Completely Re-designed and Engineered for Ease of Use and Superior Performance.

- **Smooth Rolling Action:** Non-corrosive maintenance free double-shielded wheel bearings for no maintenance and smooth unhindered operations. Zinc plated and powder coated for durability, It will work for years!
- **Precise Alignment:** Adjustment can be made in 1/8" increments to precisely fit your beam for smooth effortless operation.
- **Dual Adjustment Dials:** Integrated adjustment dials are fixed to trolley side plates but rotate freely to easily center the device on the beam for smooth operation, preventing twisting and turning as it moves along the beam.
- **Trolley Guards:** The guards protect the wheels from damage, keeps beam ahead of trolley clear of debris and serves as back-up safety to the wheels.

Versatile & Economical: Use on overhead I-Beams for a practical and safe personal fall protection anchorage connector. It's lightweight and easy to install, remove and relocate to the next job.

- 2103143 - Trolley, fits beam flanges from 3" to 8" and flange thicknesses up to 11/16"

#### Self Retracting Lifelines

- 3403400 - Sealed SRL, 50 ft. 3/16" galv. cable (3403500 - 85 ft., 3403600 - 130 ft. models)
- 3504433 - Ultra-Lok® SRL, 20 ft. 3/16" galv. cable (3504430 - 30 ft., 3504450 - 50 ft. models)
- 3103208 - Ultra-Lok® SRL, 20 ft. of 1" webbing (3103108 - 11 ft. model)

With a full quality assurance program certified under ISO 9001, DBI/SALA supplies the industry with a quality range of safety products to provide absolute security. That's why we back each of our fall protection and rescue systems with the best training, tech assistance and customer service in the business. It makes life easier for you and safer for the workers up there.